



DOUBLE SLIDER



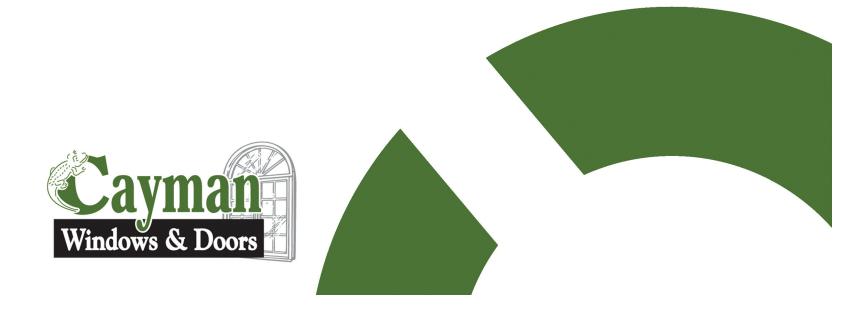



PVC 3 1/4"

DOUBLE SLIDER

CHARACTERISTICS

- 1. Multi-chamber welded PVC frame for better insulation.
- 2. Strong PVC welded sash.
- 3. Virgin PVC extruded profiles provide a glossy finish and facilitate cleaning.
- 4. Embedded tandem rollers, for easy operation.
- 5. Integrated handle on the sashes.
- 6. Sashes can be tilted and removed to facilitate easy cleaning.
- 7. Full overlapping screen for bug free ventilation, easy removal and a clean look.
- 8. 3/4" integrated return groove for multiple jamb options.



OPTIONS

- A. Multitude of interior or exterior mouldings.
- B. Double or triple glazing.
- C. Various internal grille shapes, colour and patterns along with external mounted SDL grilles.
- D. Self engaging lock system.
- E. Premium vent control stop.



PERFORMANCES

	NAFS-08	CSA A440-00
Air filtration/exfiltration:	A3	A3
Water resistance:	35/70	B3/B5
Design Pressure:	DP50	C2/C4
Primary designator:	R-PG35 1600 x 1100 (63x43) Type HS	
	D DC50 1600 v 1100 (62v/12) Typo US	

R-PG50 1600 x 1100 (63x43) Type HS







Vent Control Stop







Brantford: 519-753-3939 Kitchener: 519-569-8700 Hamilton: 905-972-9988 Oakville: 905-567-5900 Toll Free: 866-757-1241



76 Middleton St, Brantford, ON, N3S 7V7 info@caymanwindows.com www.caymanwindows.com